DMEGC SOLAR

TIER 1 Bloomberg NEW ENERGY FINANCE


iNFINITY RT

N-type

Bifacial Module with Double Glass

DMxxxG12RT-B54HBW

505~525W

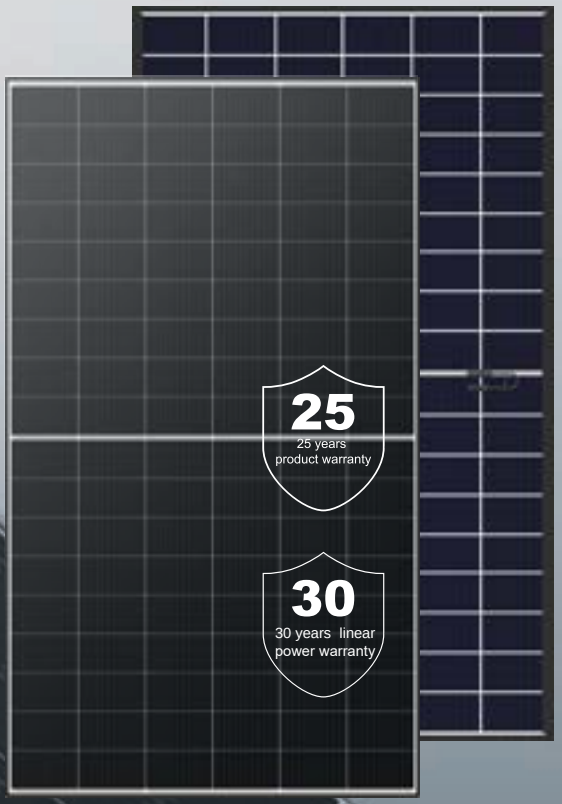

23.4%
Max. Efficiency


- **Leading manufacturing**
  40+ years experience in high-tech manufacturing.
- **High environmental, social and governance responsibility (ESG)**
  100% green production, transparent supply chain and excellent ESG rating in the solar industry.

Higher Module Efficiency
Increased energy yield due to optimized material use.

Extended Stress Tests
Protection against harsh environmental conditions
Certified by T¦ V Rheinland.

Green Product
Focus on circular economy - low carbon footprint,
PFAS-free and recyclable components.

POWER WARRANTY

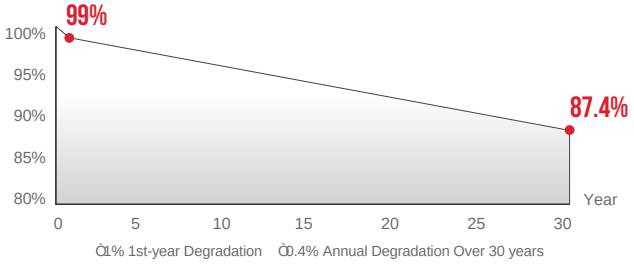

COMPANY MANAGEMENT SYSTEM

SA 8000: ILO Standards. Social responsibility standards
ISO 9001: Quality management system
ISO 14001: Environmental management system
ISO 45001: Occupational health and safety management system
ISO 50001: Energy management system
ISO 27001: Information security management system

PRODUCT CERTIFICATION

IEC 61215, IEC 61730
Extended-Stress (IEC TS 63209)
Ammonia Corrosion (IEC 62716)
Salt Mist Corrosion (IEC 61701)
LeTID (IEC TS 63342)
Dust & Sand (IEC 60068)

SolarPower Europe


Munich RE

A member of Hengdian Group

DMxxxG12RT-B54HBW

Module Specification

Cell Type	N type Mono-crystalline, 108(6Ï 18)
Dimensions (mm)	1977Ï 1134Ï 30
Weight (kg)	27.1
Front Cover	2mm heat strengthened glass, Anti-reflective coating
Rear Cover	2mm heat strengthened glass
Junction Box	3Diodes, IP68 according to IEC 62790
Output Cables (Including Connector)	4mm¦/Portrait: 300mm (+)/200mm(-) Landscape: 1200mm(+)/1200mm(-) Length can be customized
Connector Type	PV-ZH202B or MC4-EVO 2A(1500V)

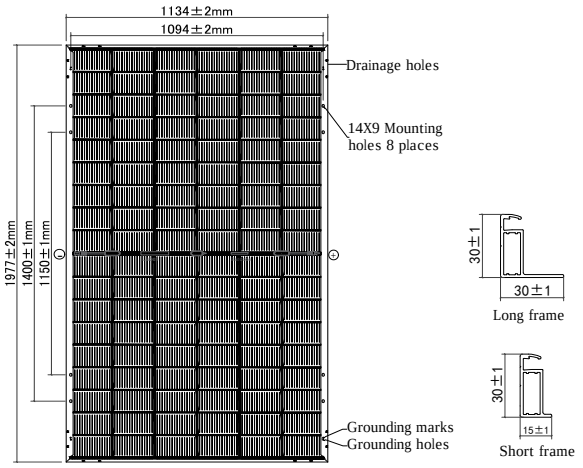

Back side (mm)

Electrical Specifications[1]

Module Type	DM505G12RT-B54HBW		DM510G12RT-B54HBW		DM515G12RT-B54HBW		DM520G12RT-B54HBW		DM525G12RT-B54HBW	
Testing Condition	STC¦	NMOT¦	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	505	385	510	389	515	393	520	396	525	400
Maximum Power Current (Imp/A)	14.80	12.03	14.84	12.06	14.88	12.09	14.92	12.12	14.96	12.16
Maximum Power Voltage (Vmp/V)	34.13	32.02	34.37	32.25	34.61	32.47	34.85	32.70	35.09	32.92
Short-circuit Current (Isc/A)	15.73	12.68	15.78	12.72	15.83	12.76	15.88	12.80	15.93	12.84
Open-circuit Voltage (Voc/V)	40.49	38.97	40.62	39.09	40.75	39.22	40.88	39.34	41.01	39.47
Module Efficiency STC (%)	22.5		22.7		23.0		23.2		23.4	

[1] Measurements according to IEC 60904-3, Measurement tolerance: Isc: Ñ4%, Voc: Ñ3%, Test uncertainty for Pmax: Ñ3%, Bifaciality: 80%Ñ5%
[2] STC (Standard Test Condition): Radiation 1000W/m¦, Module temperature 25ÁC, AM=1.5
[3] NMOT: Radiation 800W/m¦, Ambient temperature 20ÁC, AM=1.5, Wind Speed 1m/s

Electrical Specifications[1](BNPI[2])

Nameplate Power (W)	505	510	515	520	525
Maximum Power (Pmax/W)	559	564	570	575	581
Maximum Power Current (Imp/A)	16.33	16.38	16.42	16.47	16.51
Maximum Power Voltage (Vmp/V)	34.17	34.41	34.65	34.89	35.13
Short-circuit Current (Isc/A)	17.31	17.36	17.42	17.47	17.53
Open-circuit Voltage (Voc/V)	40.49	40.62	40.75	40.88	41.01


[1] Measurements according to IEC 60904-3, Measurement tolerance: Isc:Ñ4%, Voc: Ñ3%, Test uncertainty for Pmax: Ñ3%
[2] BNPI: Front radiation 1000W/m¦, Rear radiation 135W/m¦, Module temperature 25ÁC, AM=1.5

Operating Conditions

Operating Temperature (ÁC)	-40 to +85
Maximum System Voltage (V)	1500 DC(IEC)
Overcurrent Protection Rating (A)	30
Power Output Tolerance (%)	0~3
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 5400 / Back 2400
Max. Design Load, Push/Pull (Pa)	Front 3600 / Back 1600

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42Ñ2ÁC
Temperature Coefficient of Pmax (%/ÁC)	-0.29
Temperature Coefficient of Voc (%/ÁC)	-0.25
Temperature Coefficient of Isc (%/ÁC)	+0.048

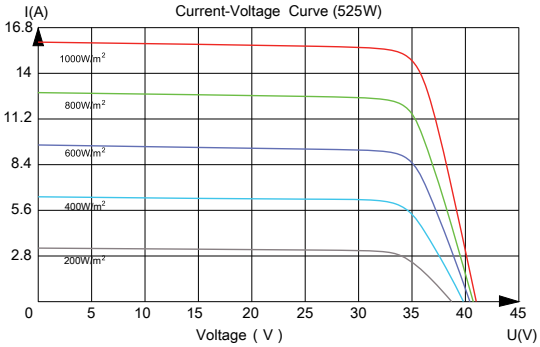

Packaging

Container	40HQ
Pallet Dimensions (mm)	1985x1140x1250
Pieces per Pallet	36
Pieces per Container	864

Hengdian Group DMEGC Magnetics Co.,Ltd.
Add: Hengdian Industrial Zone, Dongyang City Zhejiang Province, China 322118
Tel: 0086-579-8658-8826 **E-mail:** solar@dmegc.com.cn **Website:** www.dmegcsolar.com

DMEGC Renewable Energy B.V.
Add: Industrieweg 2,2641 RM Pijnacker, The Netherlands.
Tel: +31 (0) 8 58200765 **E-mail:** contact@dmegc.eu

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail. All information in this data sheet corresponds to EN 50380. Changes and errors excepted. Document: EN DS-G12RT-B54HBW Plus-20250725.
ÉDMEGC 2025 ï All Rights Reserved